



# GENERAL PURPOSE **BATTERIES**

ST12-40 (12V 40Ah)




# ST SERIES - GENERAL PURPOSE

## ST12-40



### LAYOUT

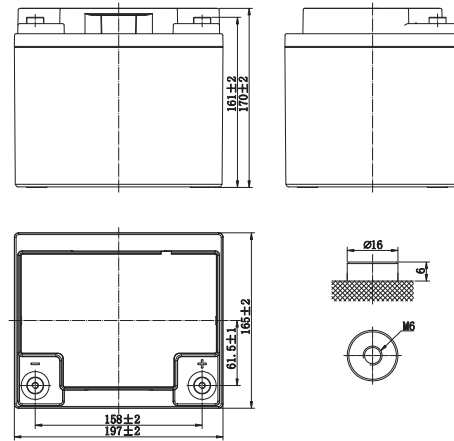

## General Features

- ✓ 10 years design life(25°C)
- ✓ Special exhaust structure and sealing technology, safe and reliable, flexible installation, convenient maintenance
- ✓ PbCaSn alloy for plate grids: less gassing, less self-discharging
- ✓ High quality AGM separator: extend cycle life and prevent micro short circuit
- ✓ High purity raw material: ensure low self discharge rate

## Applications

- ✓ All purpose
- ✓ Uninterruptable Power Supply (UPS)
- ✓ Electric Power System (EPS)
- ✓ Emergency backup power supply
- ✓ Alarm and security system
- ✓ Communication power supply
- ✓ DC power supply
- ✓ Auto control system

## Standards

- ✓ Compliance with IEC 60896 standards, EU Battery Directive
- ✓ UL, CE Certified
- ✓ Manufactured in Starmax® IATF16949, ISO45001, ISO 9001 and ISO 14001 certified production facilities



# SPECIFICATIONS

Rated Voltage	12V	
Nominal Capacity	40.0Ah	(C <sub>10</sub> ,1.80V/cell)
Dimensions	Length	197±2mm (7.76 inches)
	Width	165±2mm (6.50 inches)
	Container height	170±2mm (6.69 inches)
	Total height	170±2mm (6.69 inches)
Approx. weight	13.7 Kg (26.9 lbs)	
Terminal	M6	
Container material	ABS	
Rated capacity (25°C)	42.0 Ah	C20(2.10A,1.80V/cell)
	40.0 Ah	C10(4.00A,1.80V/cell)
	36.4 Ah	C5(7.28A,1.75V/cell)
	33.3 Ah	C3(11.1A,1.75V/cell)
	25.5 Ah	C1(25.5A,1.60V/cell)
Max. discharge current	400A (5s)	
Internal resistance (25°C)	Approx 9.0mΩ	
Operating temp. range	Discharge	-15~50°C (5~122°F)
	Charge	-20~40°C (-4~104°F)
	Storage	-15~40°C (5~104°F)
Nominal operating temp. range	25±3°C (77±5°F)	
Cycle Use	Initial Charging Current less than 12.0A. Voltage 14.4V~15.0V at 25°C(77°F)Temp. Coefficient -30mV/°C	
Standby Use	Initial Charging Current less than 12.0A. Voltage 13.5V~13.8V at 25°C(77°F)Temp. Coefficient -20mV/°C	
Effect of temp. to Capacity	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self discharge	ST series batteries may be stored for up to 6 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	


### Constant Current Discharge (Amperes) at 25°C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	83.2	59.2	51.3	40.3	36.1	26.4	22.3	16.2	13.6	9.99	7.84	6.80	5.99	4.61	3.82	2.03
1.80V/cell	94.6	67.2	58.1	45.6	39.3	28.0	23.1	16.7	14.1	10.8	8.36	7.15	6.44	4.85	4.00	2.10
1.75V/cell	102.8	72.8	62.9	49.2	40.1	29.0	24.3	17.6	14.8	11.1	8.52	7.28	6.49	4.88	4.04	2.12
1.70V/cell	109.9	77.7	66.9	52.2	40.9	29.5	24.8	18.0	15.1	11.3	8.67	7.40	6.52	4.95	4.08	2.14
1.67V/cell	113.7	80.1	68.8	53.6	41.5	30.0	25.1	18.2	15.3	11.4	8.80	7.55	6.55	5.02	4.13	2.17
1.60V/cell	117.8	82.9	70.9	55.0	42.1	30.4	25.5	18.5	15.5	11.5	8.91	7.66	6.60	5.09	4.18	2.19


### Constant Power Discharge (Watts/cell) at 25°C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	155.4	111.3	97.1	76.7	70.3	50.7	44.1	32.0	27.0	19.9	15.7	13.7	11.8	9.33	7.75	4.12
1.80V/cell	173.9	124.5	108.7	85.8	75.9	53.4	45.4	33.0	27.8	21.5	16.7	14.3	12.7	9.79	8.10	4.26
1.75V/cell	185.6	132.9	116.0	91.6	76.9	55.0	47.4	34.5	29.1	21.9	16.9	14.5	12.7	9.82	8.17	4.30
1.70V/cell	195.1	139.7	121.9	96.3	77.8	55.7	48.1	35.0	29.6	22.2	17.2	14.7	12.8	10.0	8.25	4.34
1.67V/cell	198.3	142.0	123.9	97.9	78.3	56.2	48.6	35.4	29.9	22.3	17.4	15.0	12.8	10.1	8.34	4.39
1.60V/cell	201.0	144.0	125.6	99.3	78.7	56.5	48.9	35.6	30.1	22.4	17.5	15.1	12.9	10.2	8.42	4.43


## Discharge Characteristics

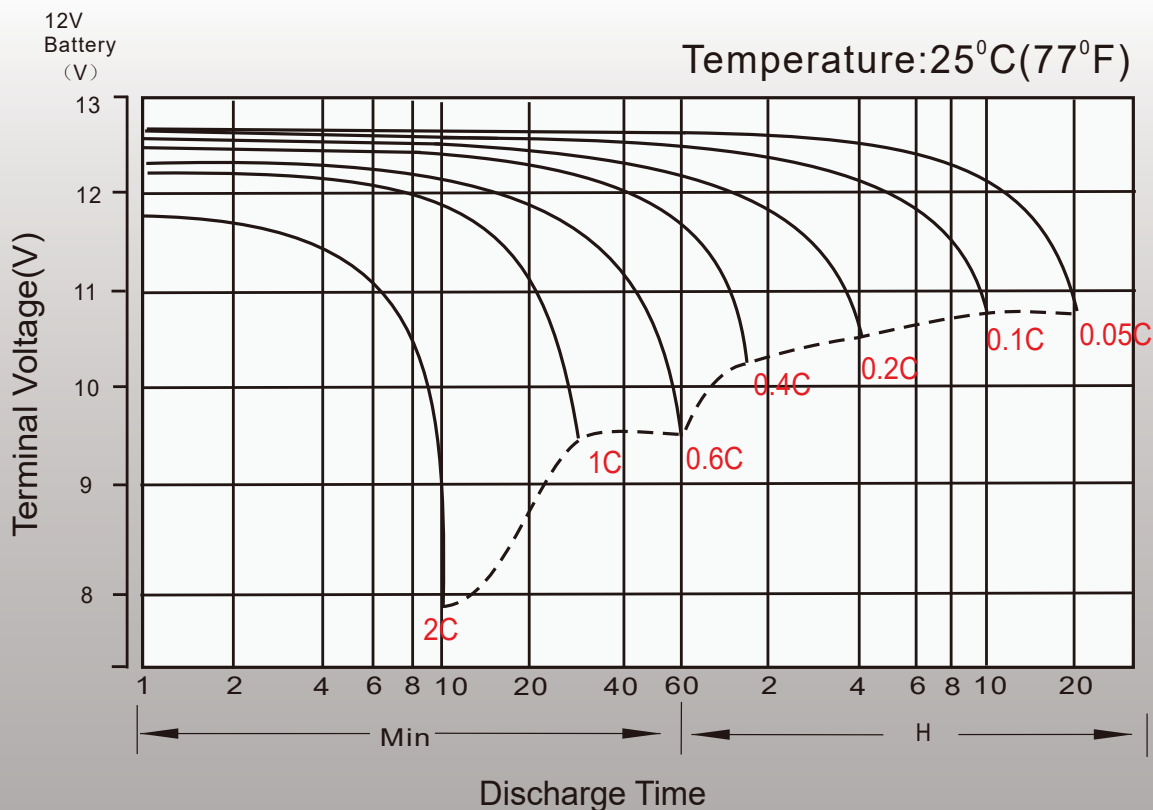


# Float Charging Characteristics

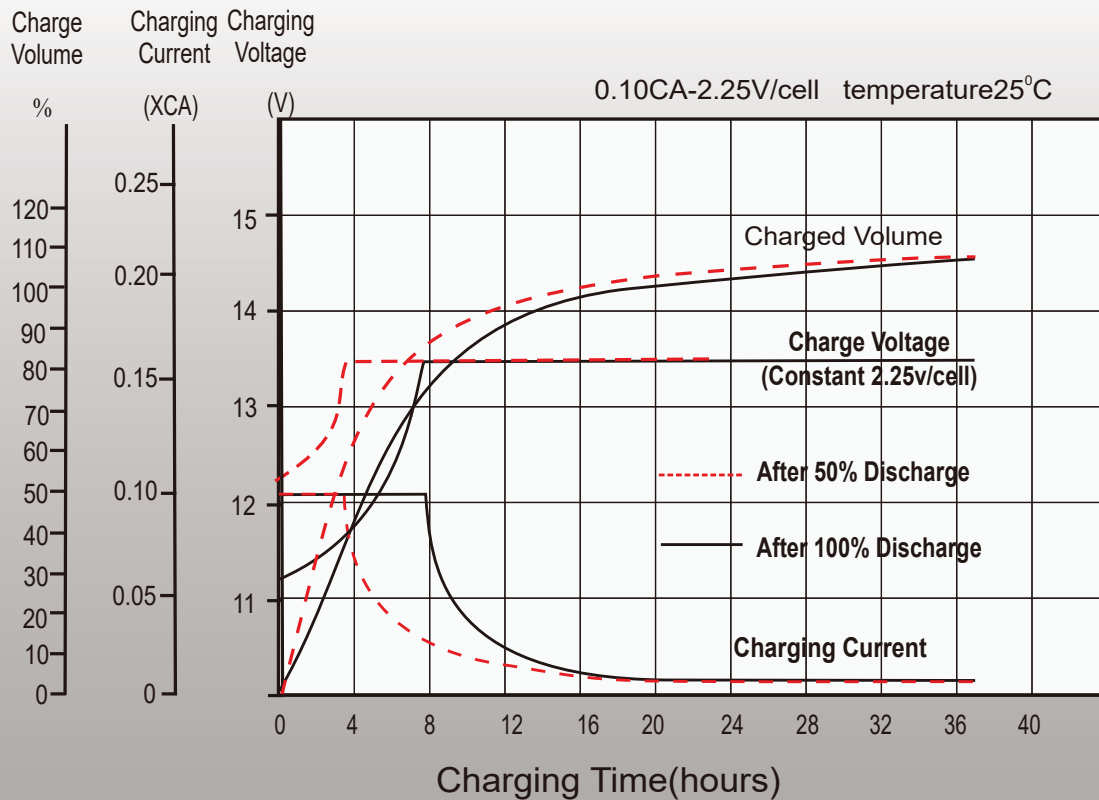

# Temperature Effects in Relation to Battery Capacity

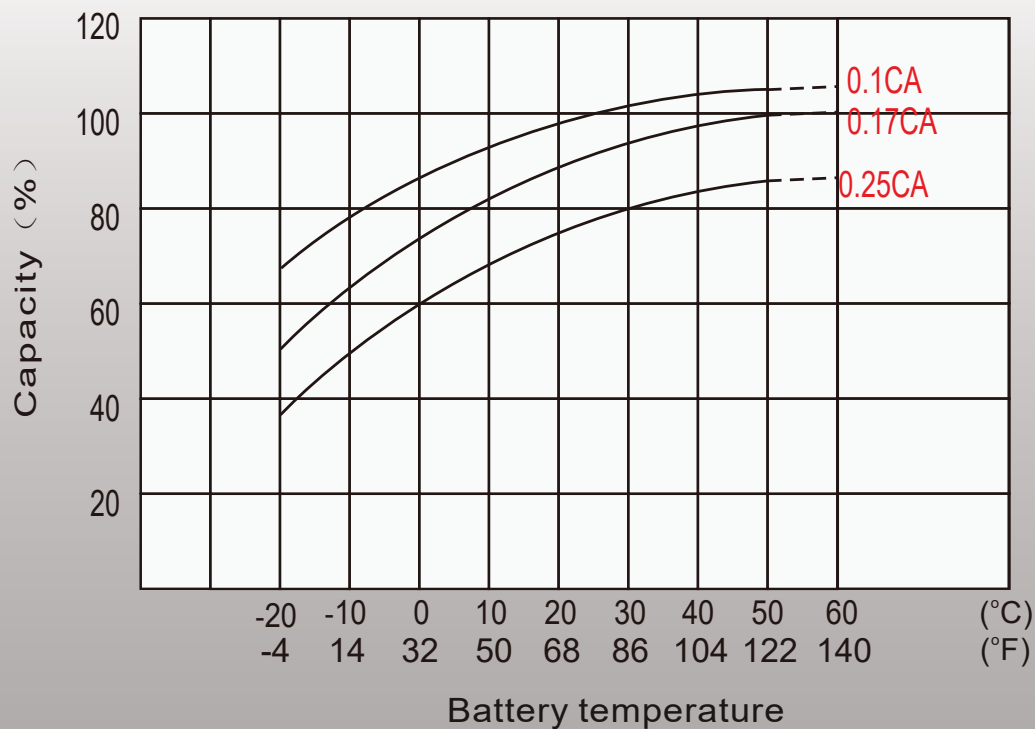

# Float Service Life

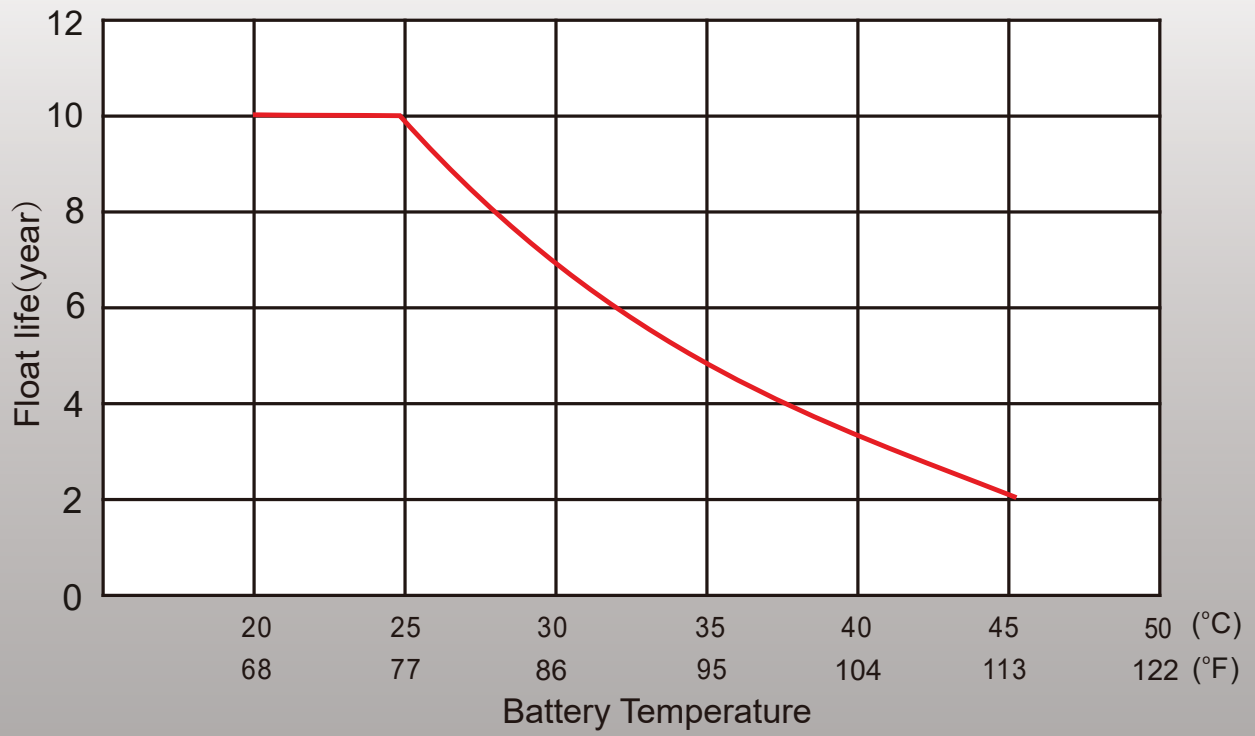

# ST12-40 (12V 40Ah)



## Starmax Corporation

1585 Cliveden Avenue, Delta, British Columbia  
V3M 6M1, Canada

Phone: +1 888 669 1310

Email: [info@starmaxbatteries.com](mailto:info@starmaxbatteries.com)

Website: [www.starmaxbatteries.com](http://www.starmaxbatteries.com)

