

STARMAX


OPzV TUBULAR GEL BATTERIES

OPzV2000-2



OPzV2000-2 (2V 2000Ah)

LAYOUT

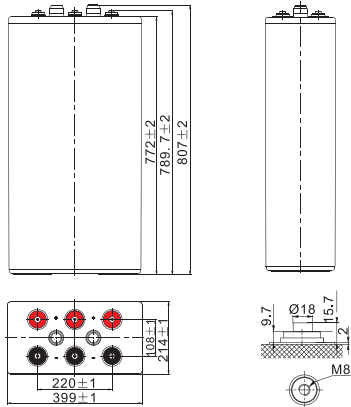

General Features

- ✓ 20 years design life(20°C)
- ✓ Better recovery performance
- ✓ Wide working temperature range (-20~55)°C
- ✓ No electrolyte stratification provides longer service life
- ✓ High recombination efficient
- ✓ Build in copper core based in lead will carry large current
- ✓ Separator imported form AMER-SIL high porosity. PVC-SiO₂ and low resistance
- ✓ Pasted negative plate special grid design increase the active material. Availability large current discharge and charge ability
- ✓ Tubuler type positive plate (polyester tube) prevent the active material from falling. Muti metal alloy pressed positive grid increase the anti corrosion ability and service life

Applications

- ✓ Green energy systems (solar, wind, hydro, etc)
- ✓ Telecommunications installations
- ✓ Solar power stations
- ✓ Alarm installations
- ✓ Railway crossing
- ✓ Street lightening
- ✓ Pump systems
- ✓ Signal station
- ✓ Street signs
- ✓ Traffic lights
- ✓ Lawn lamp

Standards

- ✓ ACC. to IEC 60896, IEC 61427, DIN 40742 standards
- ✓ UL, CE Certified
- ✓ Manufactured by Starmax, ISO 45001, ISO 9001 and ISO 14001 certified production facilities



SPECIFICATIONS

Rated Voltage	2V	
Nominal Capacity	2000Ah	C ₁₀ , 1.80V/cell
Dimensions	Length	399mm(15.71 in.)
	Width	214mm(8.42 in.)
	Container height	772mm(30.39 in.)
	Total height	807mm(31.77 in.)
Approx. weight	155.0Kg (341.72 lbs)	
Terminal	M8	
Container material	ABS	
Rated capacity (25°C)	2600.0 Ah	(100hr,26.0A,1.80V/cell)
	2000.0 Ah	(10hr,200.0A,1.80V/cell)
	1735.0 Ah	(5hr,347.0A,1.75V/cell)
	1530.0 Ah	(3hr,510.0A,1.75V/cell)
	1112.0 Ah	(1hr,1112.0A,1.65V/cell)
Max. discharge current	16000A	
Internal resistance (25°C)	Approx.0.31mΩ	
Operating temp. range	Discharge	-20°C~55°C (-4°F~131°F)
	Charge	0°C~40°C (32°F~104°F)
	Storage	-20°C~50°C (-4°F~122°F)
Nominal operating temp. range	25±3°C (77±5°F)	
Cycle Use	500.0A	
Effect of temp. to Capacity	Float	2.25V
	Temp. Coefficient	-3mV/cell/°C
	Cycle(Equalization)	2.35~2.40V
Effect of temp. to Capacity	40°C (104°F)	106%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self discharge	≤3% per month at 25°C	


Constant Current Discharge (Amperes) at 25°C (77°F)

F.V/Time	1h	2h	3h	5h	8h	10h	24h	48h	72h	100h	120h
1.85V/cell	893.8	604.4	464.0	317.4	222.5	187.4	89.0	46.5	33.5	25.4	21.9
1.80V/cell	1002.0	662.0	504.7	342.0	238.0	200.0	92.1	48.3	34.7	26.0	22.5
1.75V/cell	1041.9	685.0	516.1	348.9	242.0	203.4	92.7	49.4	35.6	26.5	22.8
1.70V/cell	1087.4	702.3	526.4	354.0	245.5	205.7	94.2	50.4	36.0	26.9	23.1
1.67V/cell	1115.9	713.8	536.2	359.7	248.3	207.4	95.0	50.9	36.3	27.4	23.4
1.60V/cell	1132.9	725.3	542.5	363.2	250.1	209.1	95.8	51.5	36.5	27.7	23.7


Constant Power Discharge (Watts/Cell) at 25°C (77°F)

F.V/Time	1h	2h	3h	5h	8h	10h	24h	48h	72h	100h	120h
1.85V/cell	1725.0	1174.3	905.1	623.4	440.9	372.6	177.9	93.2	67.2	51.0	44.0
1.80V/cell	1930.0	1283.7	979.5	669.1	471.4	397.1	183.8	96.6	69.6	52.2	45.2
1.75V/cell	1992.6	1312.5	996.7	680.6	478.3	402.9	184.8	98.7	71.3	53.2	45.9
1.70V/cell	2060.9	1341.3	1013.9	692.0	483.5	406.9	187.6	100.5	72.0	53.9	46.4
1.67V/cell	2100.8	1364.3	1031.1	697.7	488.1	410.3	189.1	101.5	72.5	54.8	47.0
1.60V/cell	2123.6	1375.8	1036.8	703.4	490.4	412.6	190.4	102.5	72.9	55.3	47.4


Charge voltage vs Ambient Temp. Curve

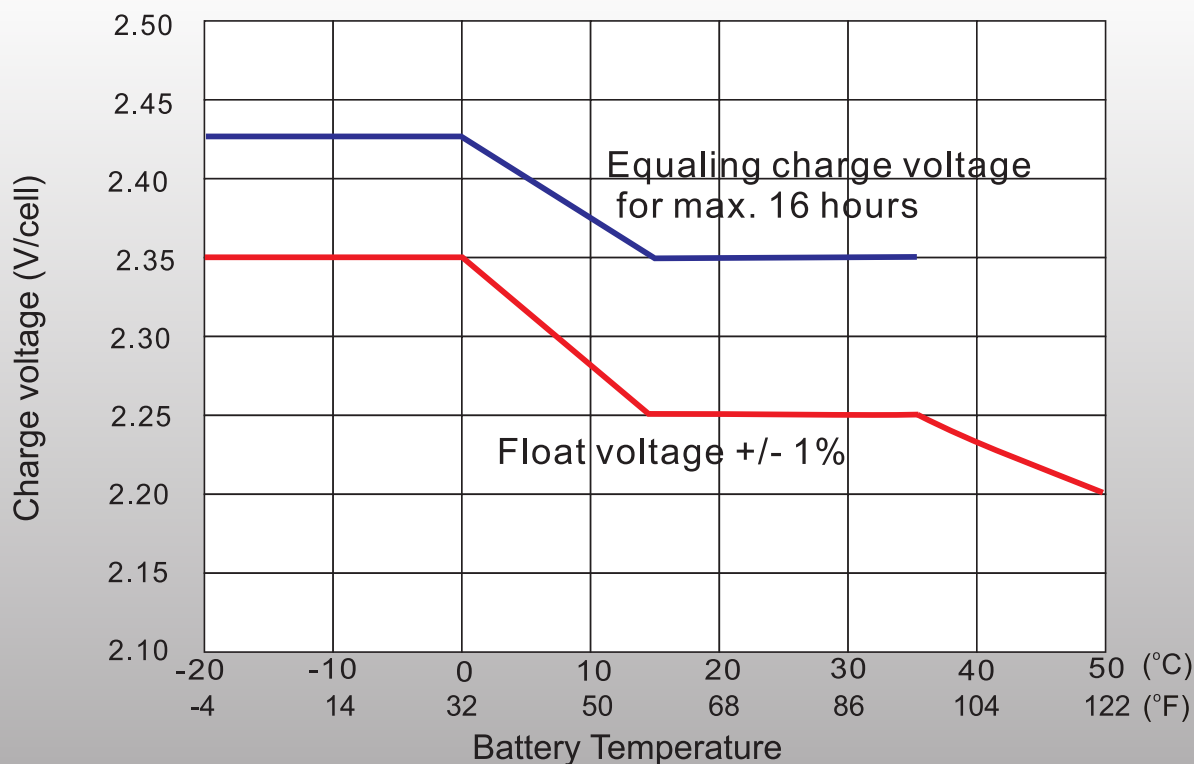


Temperature Effects in relation to Battery Capacity

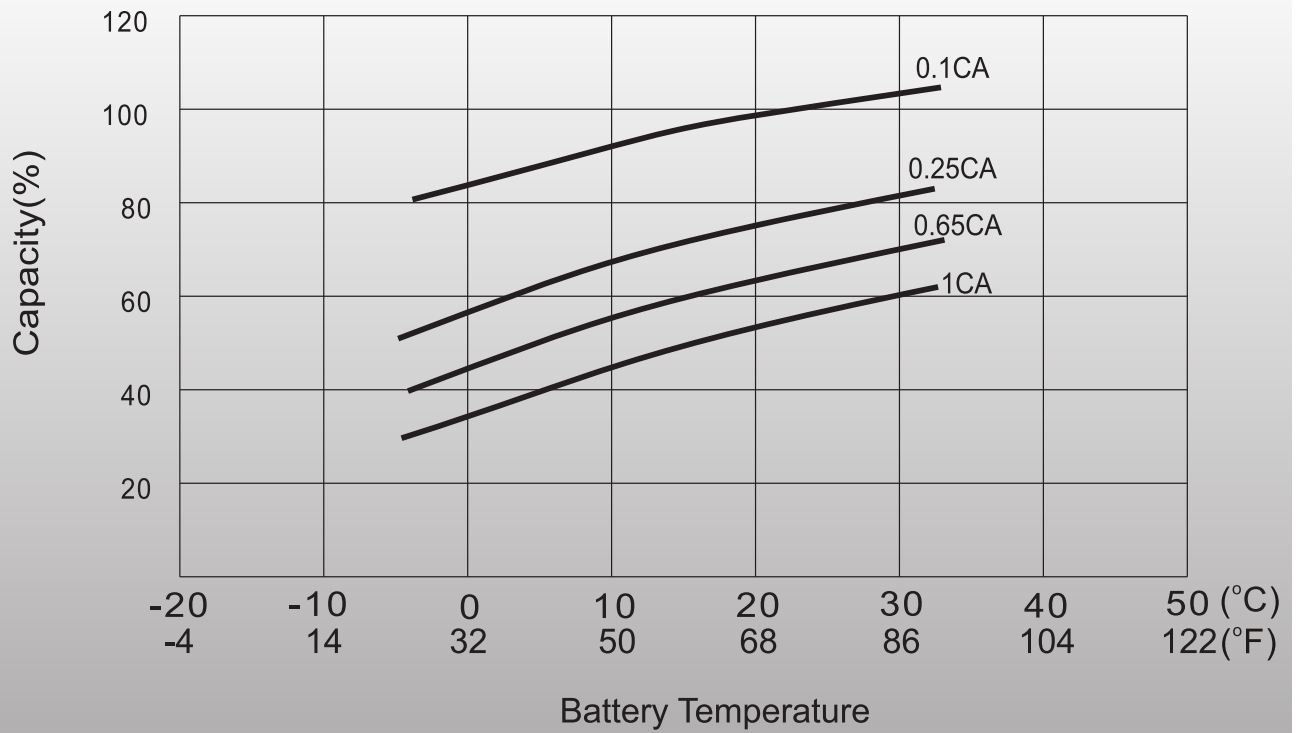

Cycle Life in Relation to DOD

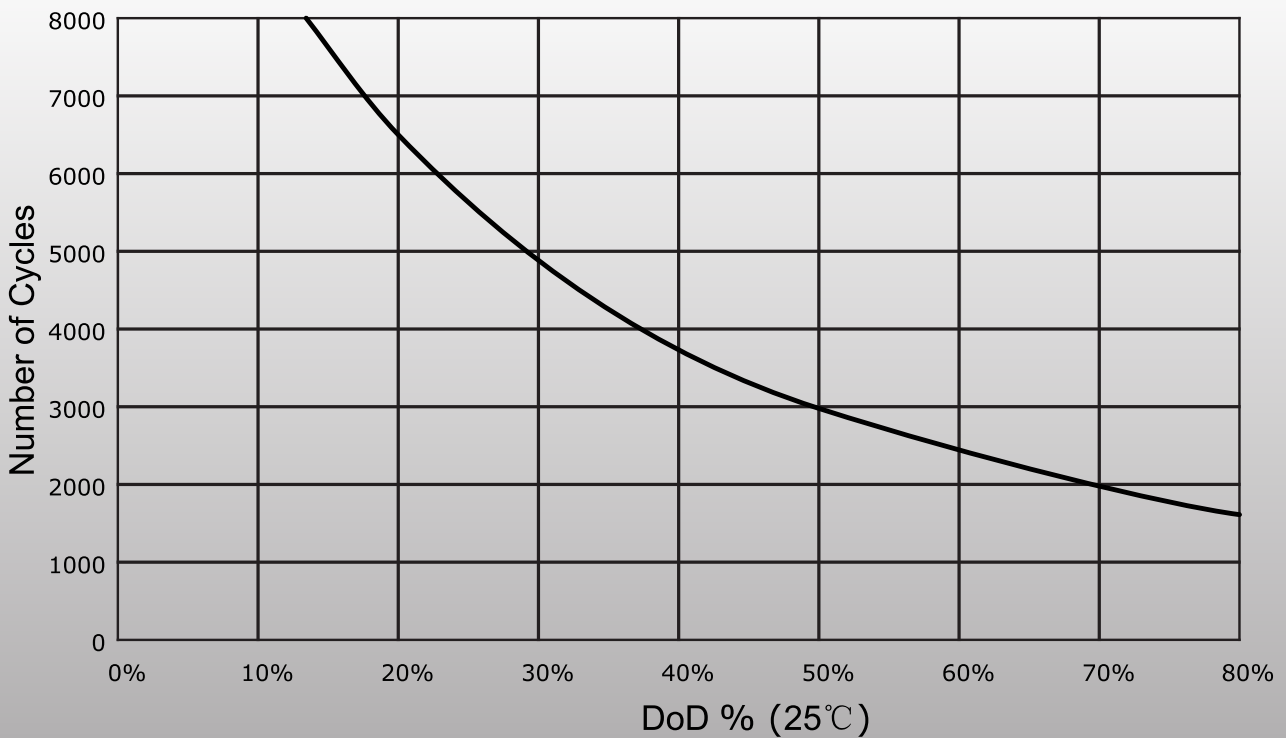

General Relation of Capacity vs Storage Time

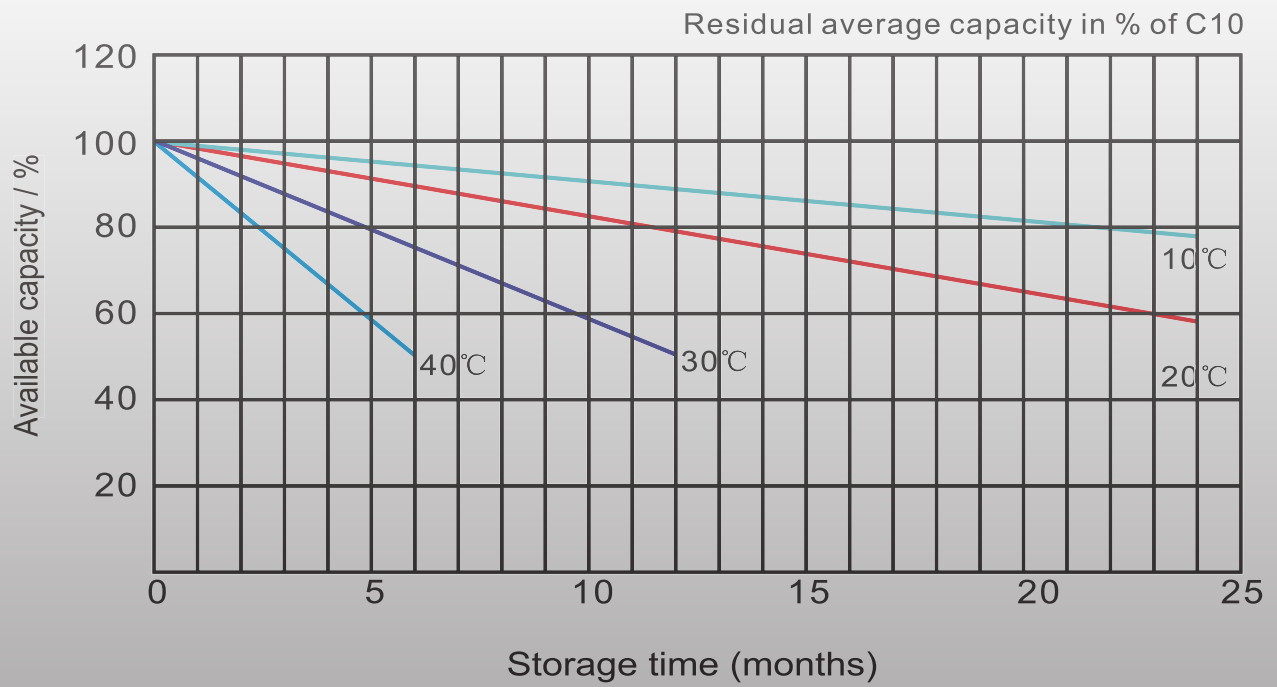



Starmax Corporation

1585 Cliveden Avenue, Delta, British Columbia
V3M 6M1, Canada

Phone: +1 888 669 1310

Email: info@starmaxbatteries.com

Website: www.starmaxbatteries.com

