




# GENERAL PURPOSE **BATTERIES**

ST4-4.5 (4V 4.5Ah)



# ST SERIES - GENERAL PURPOSE

## ST4-4.5

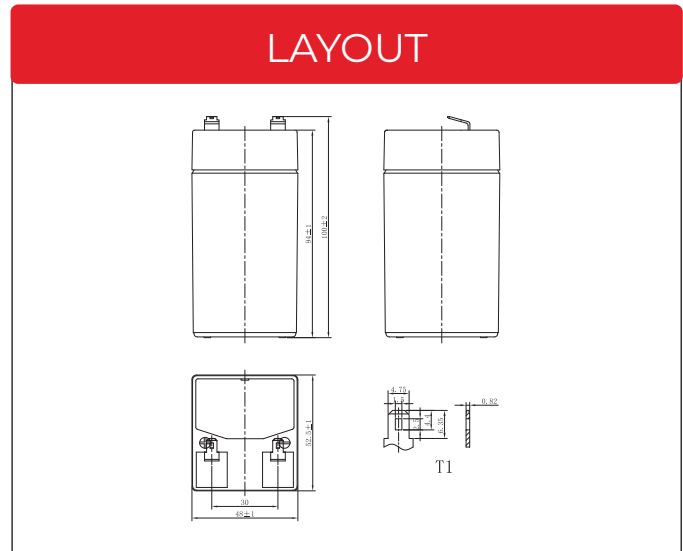

## General Features

- ✓ 5 years design life(25°C)
- ✓ Special exhaust structure and sealing technology, safe and reliable, flexible installation, convenient maintenance
- ✓ PbCaSn alloy for plate grids: less gassing, less self-discharging
- ✓ High quality AGM separator: extend cycle life and prevent micro short circuit
- ✓ High purity raw material: ensure low self discharge rate

## Applications

- ✓ All purpose
- ✓ Uninterruptable Power Supply (UPS)
- ✓ Electric Power System (EPS)
- ✓ Emergency backup power supply
- ✓ Alarm and security system
- ✓ Communication power supply
- ✓ DC power supply
- ✓ Auto control system

## Standards

- ✓ Compliance with IEC 60896 standards, EU Battery Directive
- ✓ UL, CE Certified
- ✓ Manufactured in Starmax® IATF16949, ISO45001, ISO 9001 and ISO 14001 certified production facilities



# SPECIFICATIONS

Rated Voltage	4V	
Nominal Capacity	4.5Ah	(C <sub>20</sub> ,1.75V/cell)
Dimensions	Length	52.5±1mm (2.07 inches)
	Width	48±1mm (1.89 inches)
	Container height	94±1mm (3.70 inches)
	Total height	100±2mm (3.94 inches)
Approx. weight	0.60 Kg (1.32 lbs)	
Terminal	T1/T2	
Container material	ABS	
Rated capacity (25°C)	4.50 Ah	(20hr,0.225A,1.75V/cell)
	4.26 Ah	(10hr,0.426A,1.75V/cell)
	3.84 Ah	(5hr,0.768A,1.75V/cell)
	3.36 Ah	(3hr,1.12A,1.75V/cell)
	2.80 Ah	(1hr,2.80A,1.60V/cell)
Max. discharge current	68A (5s)	
Internal resistance (25°C)	Approx 15mΩ	
Operating temp. range	Discharge	-15~50°C (5~122°F)
	Charge	-20~40°C (-4~104°F)
	Storage	-15~40°C (5~104°F)
Nominal operating temp. range	25±3°C (77±5°F)	
Cycle Use	Initial Charging Current less than 1.35A. Voltage 4.8V~5.0V at 25°C (77°F)Temp. Coefficient -10mV/°C	
Standby Use	Initial Charging Current less than 1.35A. Voltage 4.5V~4.6V at 25°C (77°F)Temp. Coefficient -6mV/°C	
Effect of temp. to Capacity	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self discharge	ST series batteries may be stored for up to 6 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	


### Constant Current Discharge (Amperes) at 25°C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	12.8	8.74	6.97	5.67	4.19	3.08	2.53	1.87	1.49	1.09	0.876	0.747	0.646	0.509	0.416	0.220
1.80V/cell	13.7	9.27	7.31	5.89	4.32	3.16	2.60	1.91	1.51	1.11	0.889	0.758	0.656	0.516	0.421	0.223
1.75V/cell	14.4	9.64	7.55	6.06	4.43	3.23	2.65	1.95	1.54	1.12	0.901	0.768	0.663	0.522	0.426	0.225
1.70V/cell	15.1	10.0	7.81	6.23	4.55	3.30	2.70	1.98	1.56	1.14	0.913	0.778	0.671	0.527	0.430	0.227
1.67V/cell	15.7	10.3	8.00	6.36	4.63	3.36	2.74	2.01	1.58	1.15	0.922	0.785	0.677	0.531	0.433	0.229
1.60V/cell	16.6	10.7	8.27	6.55	4.75	3.44	2.80	2.05	1.61	1.17	0.938	0.797	0.687	0.539	0.439	0.231


### Constant Power Discharge (Watts/cell) at 25°C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	24.1	16.6	13.3	10.9	8.10	5.97	4.93	3.66	2.91	2.14	1.73	1.48	1.28	1.01	0.826	0.440
1.80V/cell	25.7	17.5	13.9	11.3	8.32	6.11	5.03	3.72	2.96	2.17	1.75	1.49	1.30	1.02	0.837	0.445
1.75V/cell	26.8	18.1	14.3	11.5	8.49	6.22	5.12	3.78	3.00	2.20	1.77	1.51	1.31	1.03	0.844	0.450
1.70V/cell	27.8	18.7	14.7	11.8	8.67	6.34	5.19	3.83	3.04	2.23	1.79	1.53	1.32	1.04	0.853	0.454
1.67V/cell	28.5	19.1	15.0	12.0	8.80	6.42	5.26	3.88	3.07	2.25	1.80	1.54	1.33	1.05	0.858	0.457
1.60V/cell	29.6	19.7	15.4	12.3	9.00	6.54	5.36	3.94	3.12	2.28	1.83	1.56	1.35	1.06	0.868	0.462


## Discharge Characteristics

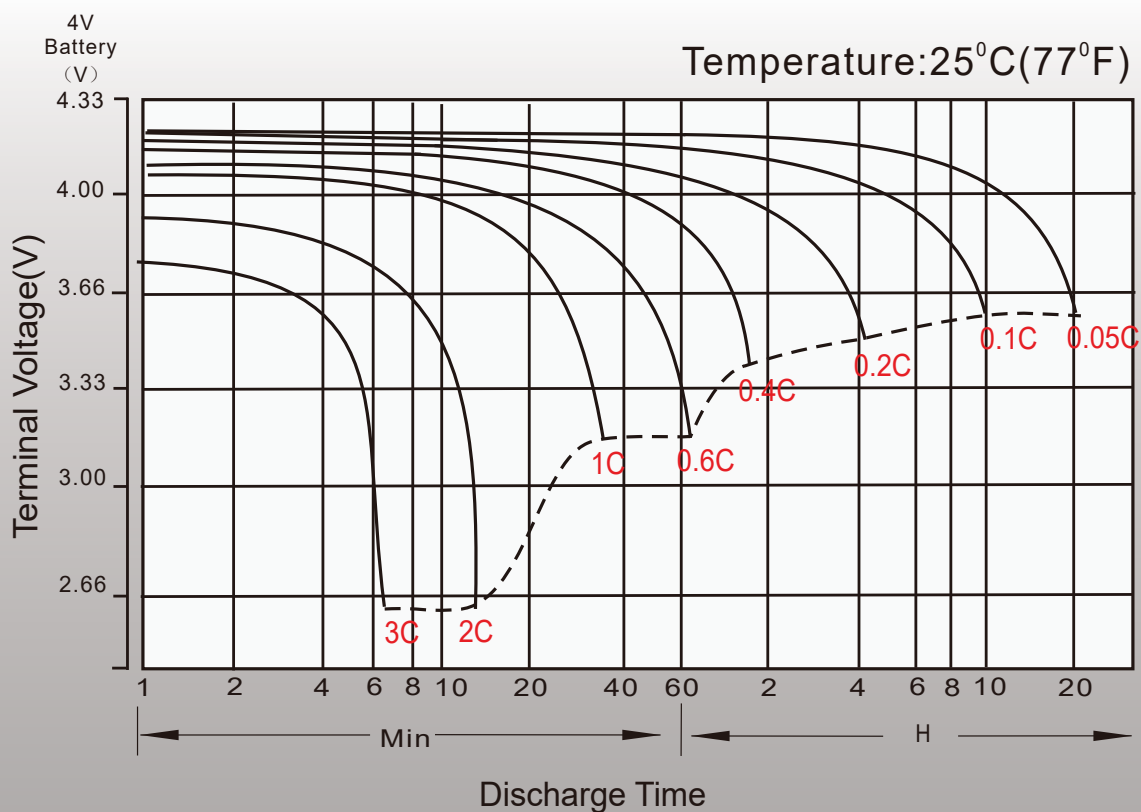


# Float Charging Characteristics

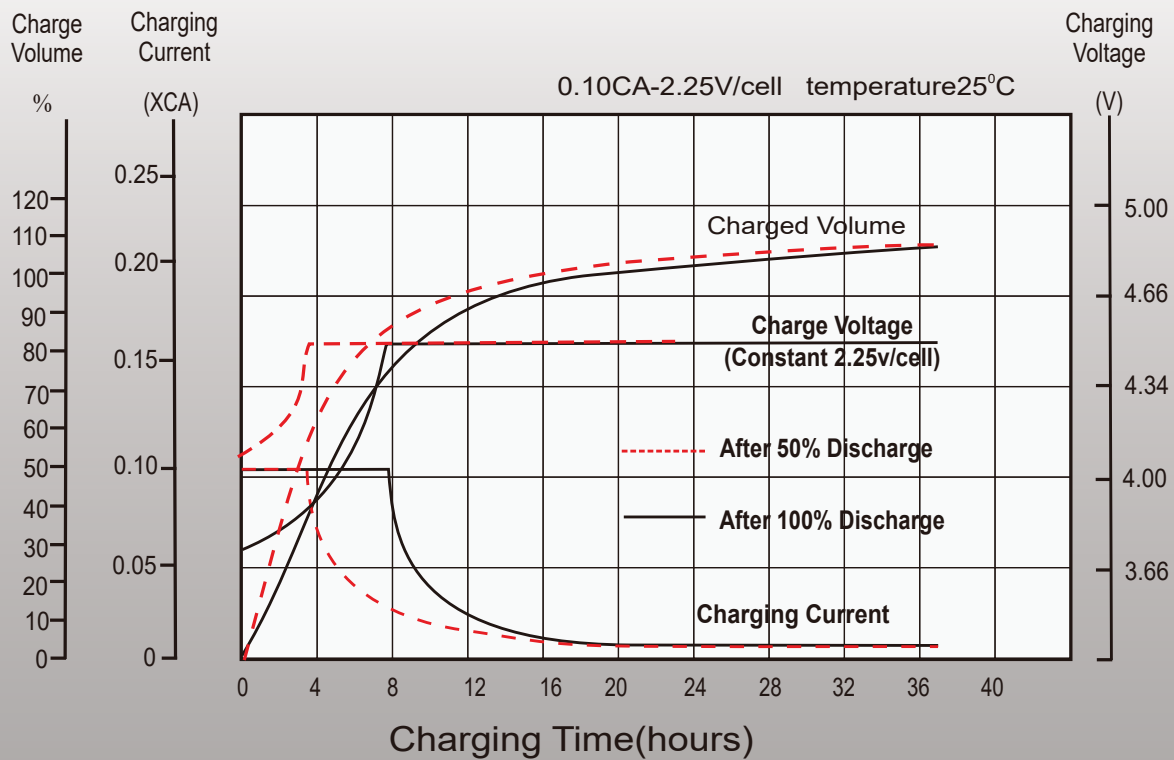

# Temperature Effects in Relation to Battery Capacity

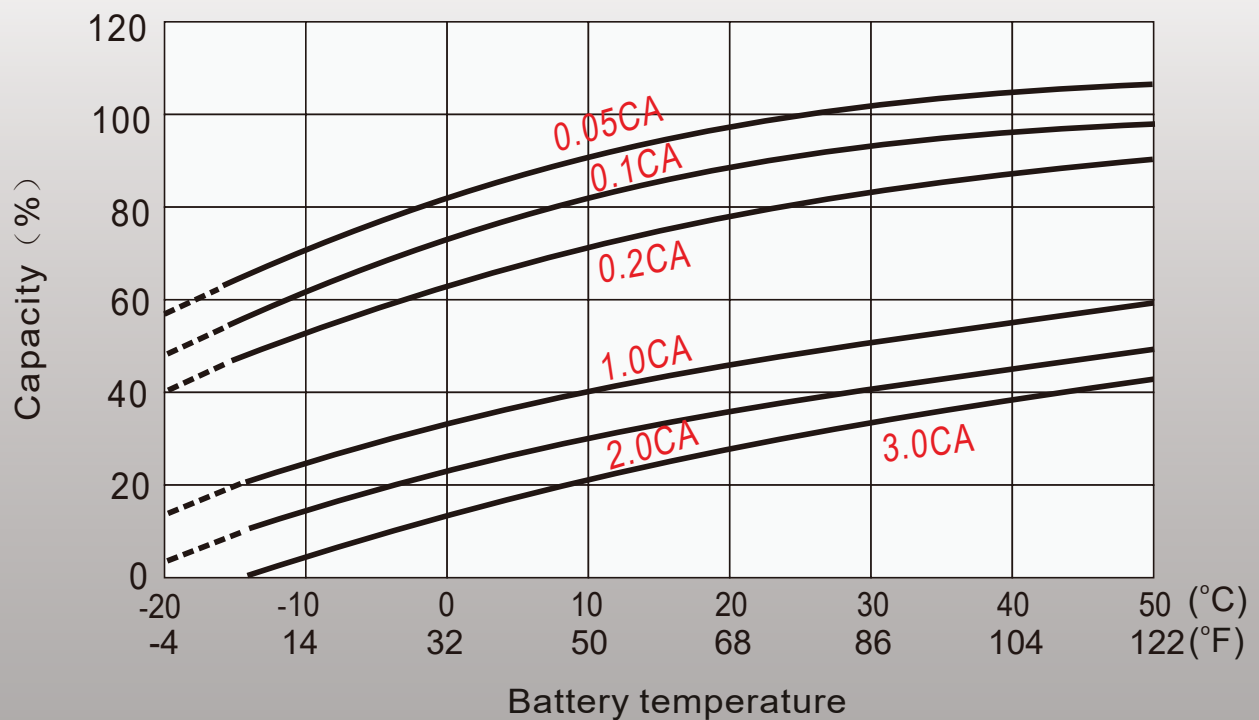

# Float Service Life

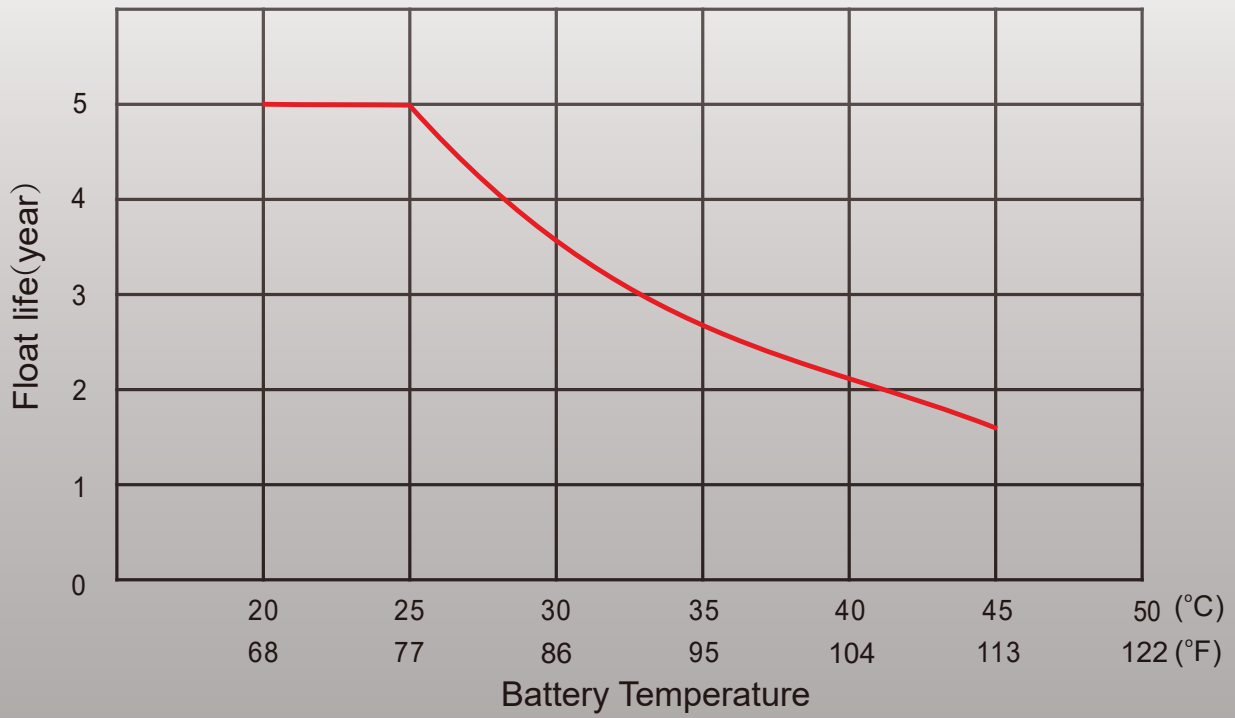

# ST4-4.5 (4V 4.5Ah)



## Starmax Corporation

1585 Cliveden Avenue, Delta, British Columbia  
V3M 6M1, Canada

Phone: +1 888 669 1310

Email: [info@starmaxbatteries.com](mailto:info@starmaxbatteries.com)

Website: [www.starmaxbatteries.com](http://www.starmaxbatteries.com)

